

Solar Trackers an emerging need for future Solar Power growth in India

Dattaraj Pawar¹, Dr. Ajit A. Shringarpure²

¹dattarajpawar@gmail.com,

²ajits25@rediffmail.com

Abstract: "To cater the need of electricity" is the biggest challenge for the Indian Power sector and thus to get the maximum output from the installed capacity is of utmost importance. With the current scenario the effective use of the limited natural resources such as coal, gas, oil, water etc. are the key factors for a sustainable growth of any power utility and the nation's economy. As far as the power sector challenges are concerned, new technology adaptations and improvements in the existing systems play a very crucial role in the future. Hence effective & maximum use of renewable energy sources is an important factor for sustainable growth and is a solution to the limited resources of our Country. An innovative and technological adaption for effective use of renewable energy sources while optimally tapping the available natural resources is one of the important factors for the environment as well as for sustainable business. This can be achieved by using proper solar tracking system; the generation will be improved roughly by 20% to 40% with incremental value of capital project cost. The aim of this paper is to suggest the maximum use of the solar energy through solar trackers for optimum generation and mainly focused on need for solar tracking system, major types and benefits associated with trackers in solar PV project.

Keywords: Solar Tracking System, fixed tilt, stationary array, Single Axis Tracker, Double Axis Tracker, Solar photovoltaic (PV)

I. INTRODUCTION

Clean, cheap and abundant power is the basic requirement for the economic development of any city, state or country. In power sector, fossil fuels are widely used for many decades but due to the increasing cost and limited availability of the fossil fuels, renewable energy sources are one of the emerging sectors of future growth. Renewable energy sources such as wind energy, solar energy, small hydro power and biomass etc are abundant in India and they not only augment the energy generation, but also contribute to improvement in the environment, energy conservation, & additional employment. Among all the renewable energy sources, solar energy has very high potential which can also help in the effective utilization of the bare land to get maximum out of it. Solar energy is a very large, inexhaustible source of energy and could supply for all present and future electricity needs of the world on a continuous basis. This makes solar energy one of the most promising

unconventional energy sources. Solar modules use light energy (photons) from the Sun to generate electricity through the photovoltaic effect. Solar PV module technology is developing rapidly due to its easy conversion of electricity. At present our approaches are focused on improving PV module efficiency or use of modern equipment /system which will get the maximum output.

The below figure no 1 shows the renewable energy installed capacity of India (all figures are in MW).

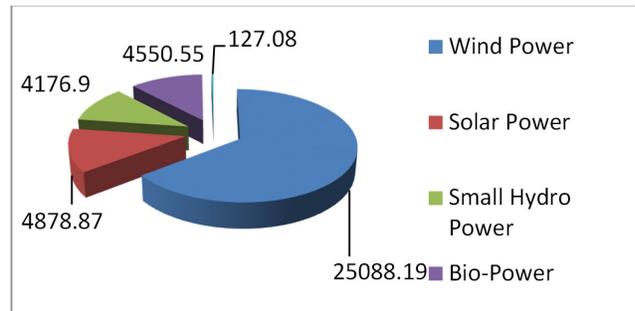


Fig 1. Programme/Scheme wise Physical Progress in 2015-16 (as on 31.12.2015) [refer from MNRE]

Solar energy has following few factors in our favor.

- 1) Unlike fossil fuels and nuclear power, it is environmentally clean source of energy.
- 2) Available in adequate quantities in almost all parts of the world where people live.
- 3) Energy harnessing is free of cost.
- 4) It has no heavy mechanical sections & is free from noise and any pollution.

Problem associated with the use of solar energy is that its availability varies widely with time. The variation in availability occurs daily because of the day night cycle and depends on seasons because of the Earth's orbit around the Sun. The main problem with solar energy is that it is a dilute source of energy. Even in the hottest regions on the Earth, the solar radiation flux can be of a low value for technological utilization. To rectify the above problems the solar panel should be tilted such that it always receives the maximum intensity of light for the maximum output.

The generation capability of a photovoltaic (PV) cell is mainly dependent on the intensity of the solar radiation. On the other hand, the changes in position of the Sun causes a variable shining intensity in different seasons and different times of the

day. For this, a digital based automatic Sun tracking system is proposed. Trackers helps the solar power generating equipment to automatically get the maximum Sunlight thereby increasing the efficiency of the system and thus the maximizing the generation. The solar tracker tracks the Sun from east to west and north to south depending on the types of trackers being used, automatically for maximum intensity of light and helps to produce optimal generation thus improving the revenue for the developer.

II. NEED FOR A SUN TRACKING SYSTEM

One way to make the Solar panel more effective is by adding the ability to track the Sun as it moves across the sky. A Solar tracker is a device used for orienting a Solar PV panel or lens towards the Sun by using the light sensors interfaced to motors, used for rotation, through a microcontroller, to have maximum solar radiation incident on the solar panel. The motors can be used to move the panels either along ONE or TWO axes.


Below are the advantages of the solar tracker:

- ✓ Increased power generation
- ✓ Surplus power generation brings in additional revenues for the company
- ✓ Less payback period because of additional revenue
- ✓ Increased investor confidence
- ✓ Increased power generation per unit area of land.
- ✓ Less land area is thus required as compared to conventional solar project of equal capacity.

How the Tracking System work:

Trackers systems works on two simple principles together. One being, the normal principle of incidence and reflection on which our tracker works and the other is the principle on which the solar (PV) panel works, which will produce electricity. Both these principles can be combined and as a result of which it can produce nearly double the output that the panel specifies normally. The working of the tracker system is explained below as per position of Sun and solar panels; they are categorized in four types.

A. Sunrise "Wake- Up

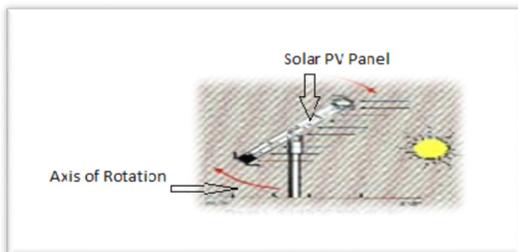


Suppose at the time of sunrise the Sun is in extreme east the reflector will align itself in some position by which the incident rays will fall on the solar panel. The Track rack begins the day facing west. Now when the earth rotates and the Sun gets

shifted from its earlier position the reflection of the incident rays will also change. As the morning Sun rises in the east, it heats the unshaded west-side canister with both direct and reflected rays (from the inter surface of the "shadow plate") forcing liquid into the shaded east-side canister and panel move to get direct sunlight.


B. Mid-Morning

The Track Rack moved by the shifting weight of liquid flowing from one side of the tracker to the other through a copper tube that connects the east and west canisters .When one canister is exposed to the Sun more than the other, its vapor pressure increases, forcing liquid to the cooler, shaded side. Thus rotated panel to move as per sun's direction.

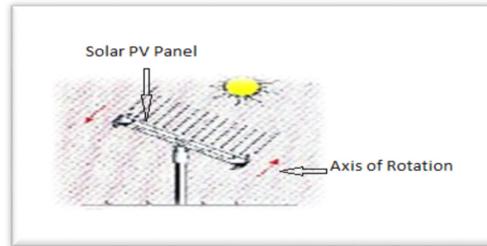

C. Mid-Afternoon

As the Sun moves, the Track Rack follows (at approximately 15° per hour) continually seeking equilibrium as liquid moves from one side of the tracker to the other.

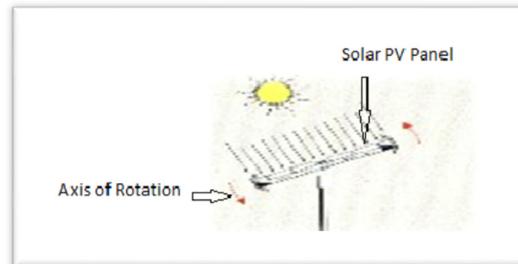

D. Sunset

The Track Rack completes its daily cycle facing west. It remains in this position overnight until it is "awakened" by the rising Sun the following morning. Again the same cycle follows for next days.

III. TYPES OF TRACKER

Solar trackers are racks for photovoltaic modules that move to point at or near the Sun throughout the day. Trackers add to the efficiency of the system, reducing size and the cost per kwh for solar power projects. Single axis trackers will track the Sun from east to west on a single pivot point. Dual Axis trackers track east to west and tilt for north to south tracking.

A. Single Axis Tracker

Single Axis Trackers are used to minimize the angle of incidence between the incoming sunlight and a solar panel with help of

sensor. This system tracks the Sun only from east to west direction. The below figure shows the single axis tracker system.

maximum power output. The slight decline in power into the afternoon is due to heating of the system

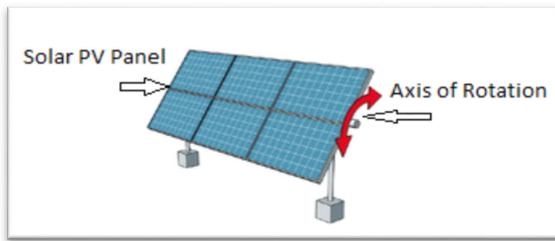


Fig.2. Single Axis Tracker

Advantages:

- ✓ Compared to solar panel in fixed tilt, single axis solar tracker has a better efficiency. The efficiency of single axis solar tracker is ~ 25 to 30%.

Disadvantages:

- ✓ Single axis solar tracker tracks Sun only from east to west direction.
- ✓ It's efficiency is less compare to dual axis solar tracker

B. Dual Axis Solar Tracker

Dual axis tracking system uses the solar panel to track the Sun from east to west and north to south. It can rotate simultaneously in horizontal & vertical directions and are able to point at the Sun at all times. Dual axis trackers track the Sun both East to West and North to South for added power output approx. 30 to 40% gains.

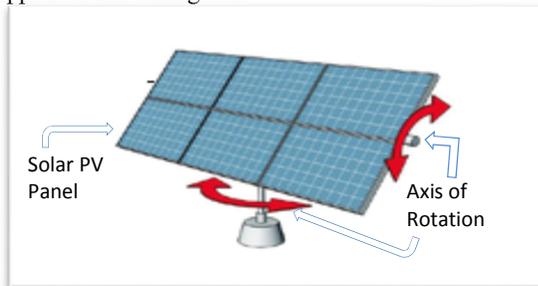


Fig.3. Double Axis Tracker

Advantage:

- ✓ Dual axis solar tracker has more efficiency than both fixed tilt panels and single axis tracker system.

Disadvantage:

- ✓ More land requirement and higher cost associated w.r.t. other system.
- ✓ Operational complexity and more O&M cost

IV. SOLAR TRACKING SYSTEM

The graph shows the portion of the panels' highest power yield for the day throughout daylight hours and energy collected from a tracking PV system & a stationary/ fixed tilt system on a clear sunny day. As the Sun rises, its direct solar radiation takes time to reach its peak. A tracking system follows this rise without loss, while a stationary system waits until noon to achieve its

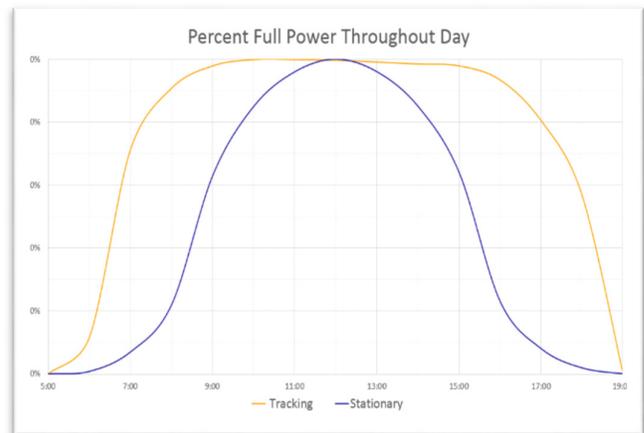


Fig.4. Typical Power curve of Stationary Vs Tracking system

The results vary depending on location, season, and weather, but generally they will look the same: tracking systems quickly reach a plateau of power for several hours, and stationary systems only briefly reach their maximum power around midday.

V. THE MERITS OF SOLAR TRACKING SYSTEM

The main reason to use a solar tracker is to produce the more power by reducing the cost of the energy. Solar tracking system can be used to capture and increase revenue with the existing installation. A tracker produces more power over a longer time than a stationary array/ fixed tilt system with the same number of modules. This additional output or gain can be quantified as a percentage of the output of the stationary array. Gain varies significantly with latitude, climate and the type of tracker we choose as well as the orientation of a stationary installation in the same location. The energy required to move the tracker is insignificant in these calculations.

Climate is the most important factor. The more solar radiation and less clouds, moisture, haze, dust, and smog, the greater the gain provided by trackers. At higher latitudes gain will be increased due to the long arc of the summer Sun. In the cloudiest, haziest locations the gain in annual output from trackers can be in the low 20 percent range.

In a generally good area, annual gains between 25 to 40 percent are typical. Seasonally in sunny area, gain ranges from 25 to 30 percent in winter (October through March) to between 30 and 40 percent in summer depending upon use of tracker. In general, a tracker adds most to output during the hours when a stationary array produces the least power.

VI. FINANCIAL ASPECT

As per the Central Electricity Regulatory Commission (CERC) guideline, Benchmark Capital Cost norm for Solar PV projects has established and shall be applicable for FY 2016-17. The

major item-wise cost per MW is given below for the ready reference.

Table 1. CERC BENCHMARK CAPITAL COST NORM FOR SOLAR PV POWER PROJECTS APPLICABLE DURING FY 16-17

Sr No	Particulars	Capital Cost norm (Rs. lakhs/MW)	% of Total Cost
1	PV Modules	310.19	61.9%
2	Land Cost	25	5%
3	Civil and General Works	35	7%
4	Mounting Structures	35	7%
5	Power Conditioning Unit	30	6%
6	Evacuation Cost up to Interconnection point (Cables and Transformers, switchyard)	40	8%
7	Preliminary and Pre-Operative Expenses including IDC and contingency	26.13	5.1%
	Total Capital Cost	501.32	100%

Computation of additional revenue generation for 1 MW (single axis and double axis) trackers w.r.t. fixed tilt solar PV project for useful life of 25 years through sale of electricity are shown in Table 2. All values in crores (crs).

Table 2. ADDITIONAL REVENUE WITH TRACKERS VS FIXED TILT - SOLAR PV

Sr. No.	Description	Fixed tilt PV	Single axis tracker - PV	Double axis tracker-PV
1	Cost/MW (Rs. Crs)	5.01	5.5	5.9
2	Additional cost	-	8.91	15.08
3	Generation (Mus)	1.50	2.19	2.72
4	Capacity Utilization Factor	19%	25%	30%
5	Tariff (Rs/unit)	4.63	4.63	4.63
6	25 years Revenue	173.63	253.49	314.33
7	Payback Period (yrs)	-	4 to 5	6 to 7

Here, considered is a very conservative approach while calculating the additional MUs and revenue associated with fixed tilt vs trackers. The tariff considered are lowest tariff quoted in NTPC-developed solar park in Andhra Pradesh's for calculating additional revenue and payback periods for respective tracker.

In reality, a shift from fixed tilt to single or double-axis tracking is very complex and has cascading cost implications due to involvement various factors. Also get an accurate cost benefit analysis is equally complex. Many financial variables need to be quantified and compared, including state wise increased costs of land, labour, materials and O&M to get accurate cost as well as additional revenue projections.

Accordingly, by doing the cost-benefit analysis Single-axis tracker are more beneficial over double axis tracker in Indian scenario. The Indian solar power sector has ballooned more than 4 GW within a couple of years. The number of companies looking to enter solar power sector have also increased tremendously resulting in steep fall in the feed-in tariffs and also favourable condition of Government policies to fulfil Country's ambitious target of 100GW of solar capacity by 2022. Now Power Sector Companies should take advantage of the rapid evolution in the solar power generation technology;

as it has technical and commercial advantages to use solar tracker for additional generation and accordingly, more revenue.

VII. CONCLUSION

Clearly, the advantages of having tracking equipment in a solar power project overwhelmingly mitigate the additional capital and O&M costs. Generally dual axis trackers are more accurate in pointing Sun, however, dual axis comes at higher price, more complexity, additional land, more O&M and lower reliability as compare to single axis tracker. On the other hand single axis tracker offers less land requirement, lower cost and higher reliability over double axis tracker. But it is obvious that power producers/developers will choose Single axis tracking system instead of double-axis tracking though power generation efficiency is high. As in Indian scenario the purchase of extra land is a very painful affair and requires a lot of effort, more time & additional cost. Thus it may not be viable to put extra cost for additional land requirement and O&M cost for useful life for double axis tracker w.r.t. single axis tracker.

In view of the above, tracker will play a very crucial role in the upcoming solar power projects. In future there will be more & more technological upgradations/innovations on both the solar tracking systems and will make solar projects more viable with good returns. Also it will maximise the output and additional revenue, thus become need/ requirement for future solar power projects.

REFERENCES

- [1] M. A. Kadam and S. B. L Garg, "Exploring regions of application of Single and Double axis Solar Tracking Systems," *Proc. of the International Conference on Advances in Mechanical Engineering*, August 3-5, 2009.
- [2] Binoy Seal, Omkar Shirke, Siddhesh Shewale, Abhilash Sirsikar ,Prof. Priya Hankare "Comparison Between Different Solar Tracking System and Wireless Technology,"*International Journal of Advanced Research in Computer Science and Software Engineering*, Vol. 4, Issue 4, April 2014, ISSN: 2277 128X.
- [3] M. Ganga Prasanna, S. Mahammed Sameer, G. Hemavathi, "Financial Analysis of Solar Photovoltaic Power plant in India,"*IOSR Journal of Economics and Finance (IOSR-JEF) e-ISSN: 2321-5933, p-ISSN: 2321-5925 PP 09-15*.
- [4] Shyngys Almakhanovich Sadyrbayev, Amangeldi Bekbaevich Bekbayev, Seitzhan Orynbayev and Zhanibek ZhanatovichKaliyev "Design and Research of Dual-Axis Solar Tracking System in Condition of Town Almaty," *Middle-East Journal of Scientific Research* 17 (12): 1747-1751, 2013 ISSN 1990-9233.
- [5] Central Electricity Regulation Commission, New Delhiorder on Date of Order: 23rd December, 2015" Determination of Benchmark Capital Cost Norm for Solar PV power projects and Solar Thermal power projects applicable during FY 2016-17".
- [6] Deepthi.S, Ponni.A, Ranjitha.R, R Dhanabal,"Comparison of Efficiencies of Single-Axis Tracking System and Dual-Axis Tracking System with Fixed Mount,"*International Journal of Engineering Science and Innovative Technology (IJESIT) Volume 2, Issue 2, March 2013*.
- [7] Shahriar Baziyari1, Reza Keypour1, Shahrokh Farhangi2, Amir Ghaedi3, Khashayar Baziyari4"A Study on the Effects of Solar Tracking Systems on the Performance of Photovoltaic Power Plants,"*Journal of Power and Energy Engineering*, 2014, 2, 718-728 *Published Online April 2014 in SciRes*.
- [8] Jeng-Nan Juang and R. Radharamanan, "Design of a Solar Tracking System for Renewable Energy,"*Proceedings of 2014 Zone 1 Conference of the American Society for Engineering Education (ASEE Zone 1)*.